
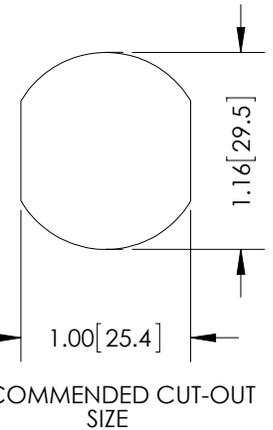



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	8/21/13	D.GRIFFIN
-	-	-	-
-	-	-	-

DESCRIPTION	MATERIAL	FINISH
SHELL / BODY	BRASS	CuSnZn3
CENTER CONTACT	BRASS/PHOS.BRONZE	GOLD/CuSnZn3
INSULATOR	PTFE	-
O-RING	RUBBER	-

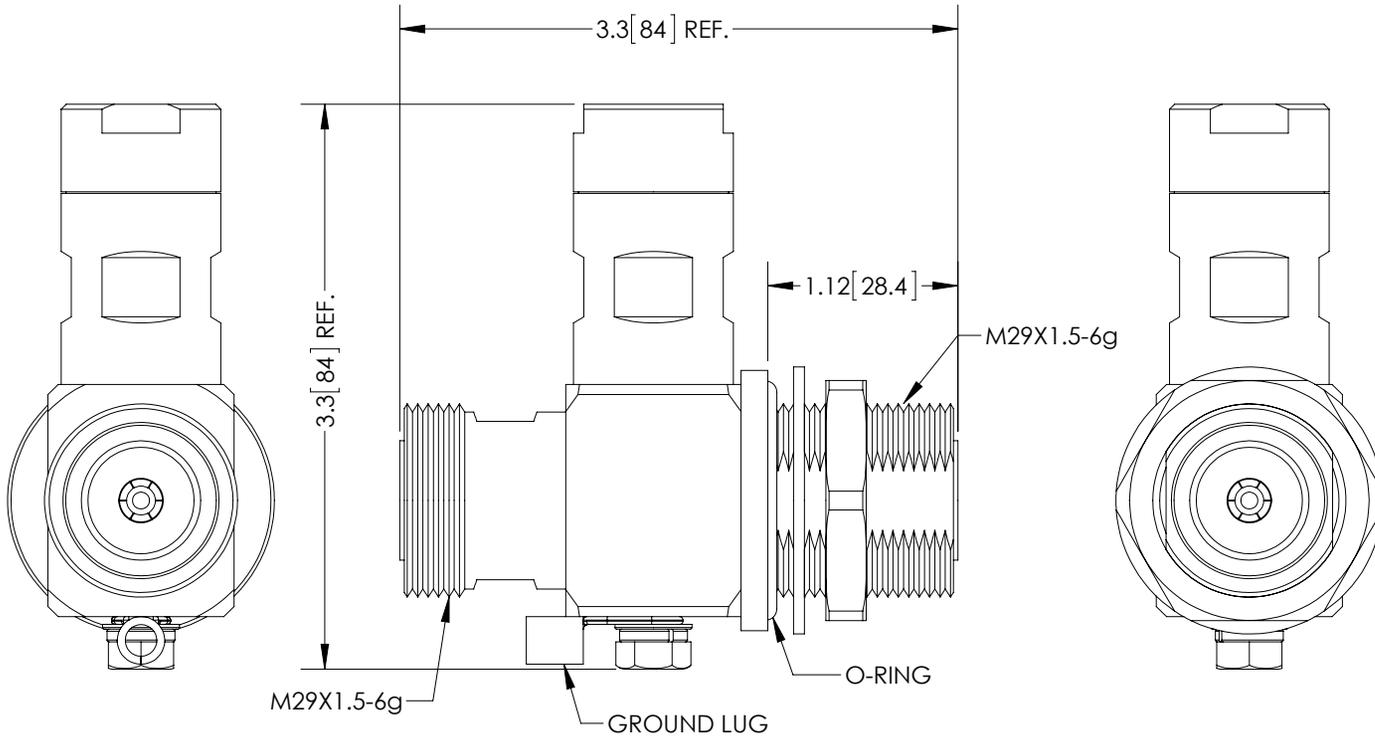

NOTES:

**ELECTRICAL:**

IMPEDANCE: 50 OHMS  
 FREQUENCY RANGE: 800 - 2250MHZ  
 DIELECTRIC WITHSTANDING VOLTAGE: 4000V (RMS)

**MISCELLANEOUS:**

COMPONENTS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATIONS PKG-00064.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

**REGULATORY COMPLIANCE:**  
 RoHS, CE

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]  DIMENSIONAL TOLERANCES: .X = ±.1 [2.54] .XX = ±.01 [.25] .XXX = ±.005 [.13]  ANGULAR TOLERANCES: ALL = ± 1°	APPROVALS DRAWN BY B.PUCHASKI	DATE 08/20/13	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845			
	CHECKED BY K.BURGNER	08/20/13		CATEGORY LIGHTNING PROTECTOR		
	APPROVED BY K.BURGNER	08/20/13	PRODUCT DESCRIPTION 7/16 DIN FEMALE TO 7/16 DIN FEMALE BULKHEAD 1/4 WAVE LIGHTNING PROTECTOR			
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. ALQ2-DFDFB	REV. <b>A</b>
PROJECTION 		SCALE: NONE		CAD FILE: ALQ2-DFDFB.SLDDRW		SHEET 1 OF 1