


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/07/2008	DFRISIELLO
B	ECN 6341: PIN SOLDER ONLY, CHNG FERRULE CRIMP SIZE. UPD FORM/PKG	08/15/2012	DFRISIELLO
C	ECN 9912: REVISE MODEL TO NEW SPEC., ADD NOTES, STRIP DIMS	07/08/2019	DFRISIELLO

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL
PIN	BRASS	GOLD
INSULATION	PTFE	NATURAL
FERRULE	BRASS	NICKEL

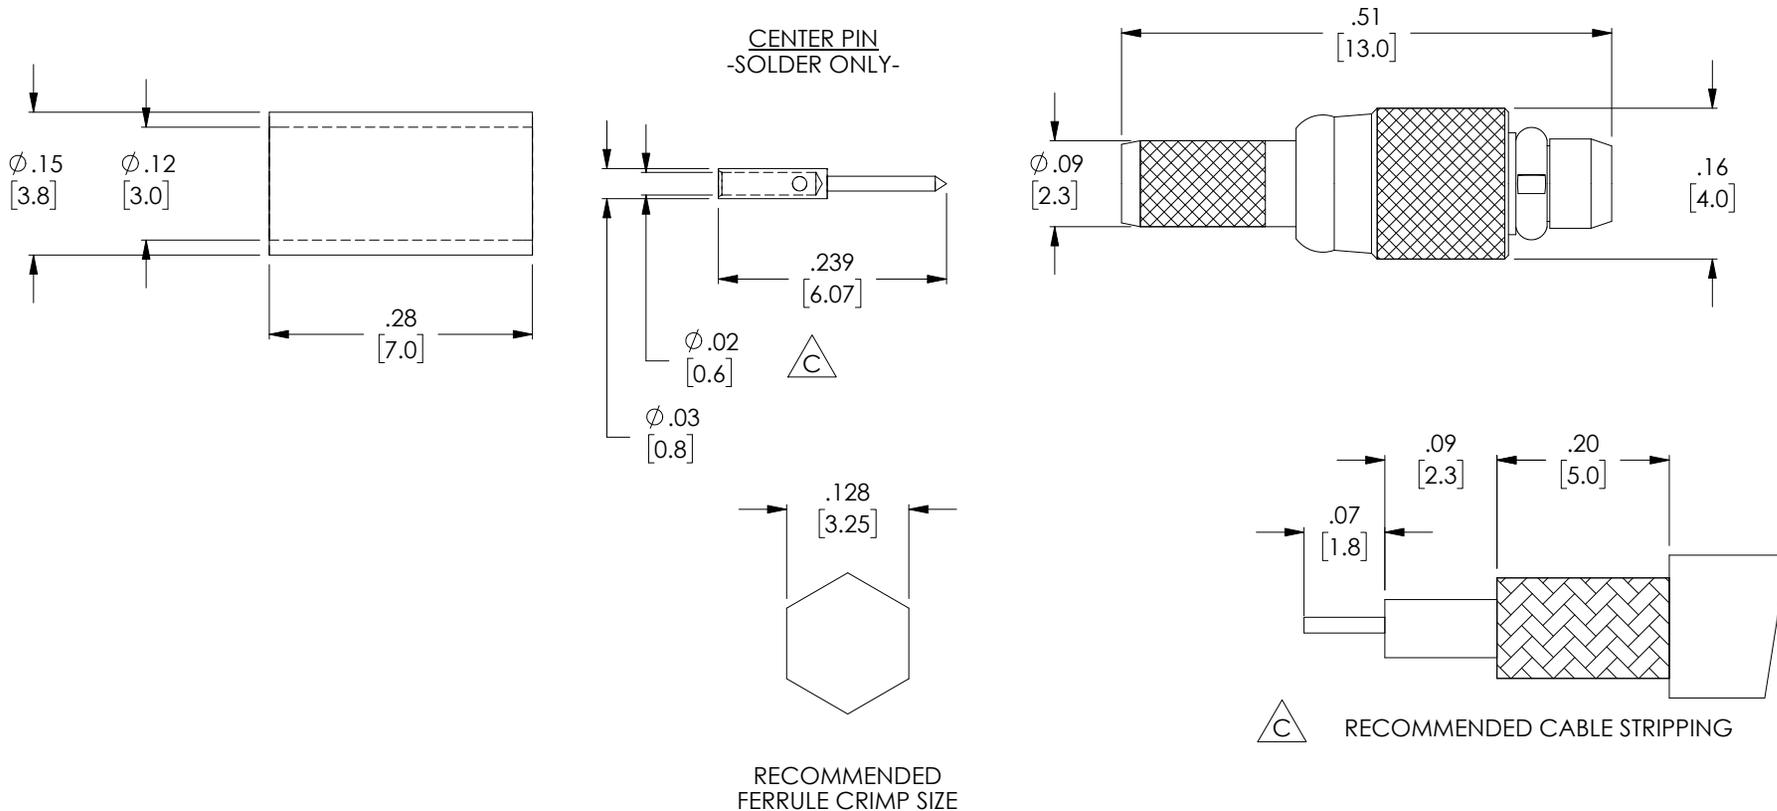

NOTES:

**CHARACTERISTICS:**

IMPEDANCE: 50 OHMS  
 FREQUENCY RANGE: DC ~ 6 GHz  
 VOLTAGE RATING: 335 VOLTS PEAK  
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VOLTS RMS  
 INSERTION LOSS: .20 dB MAX.

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY
2. ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ±.005 [1.13]	APPROVALS DRAWN BY K.BURGNER	DATE 03/07/2008		50 HIGH STREET NORTH ANDOVER, MA 01845		
	CHECKED BY K.BURGNER	03/07/2008		CATEGORY COAXIAL		
	APPROVED BY K.BURGNER	03/07/2008	PRODUCT DESCRIPTION CON, MMCX MALE STRAIGHT CRIMP			
	PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. AMMM-1106
SCALE: NONE			CAD FILE: AMMM-1106.SLDDRW		SHEET 1 OF 1	