
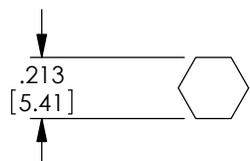





THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
C	ECN 4956: UPDATE DRAWING AND NEW FORMAT	08/09/2010	DFRISIELLO
D	ECN 9879: REVISE MODEL AND DIMENSIONS	05/28/2019	DFRISIELLO


DESCRIPTION	MATERIAL	FINISH
CONNECTOR BODY	BRASS	NICKEL PLATE
DIELECTRIC	PTFE	NATURAL
CENTER PIN	BRASS	GOLD PLATE
BARREL	BRASS	NICKEL PLATE
FERRULE	BRASS	NICKEL PLATE

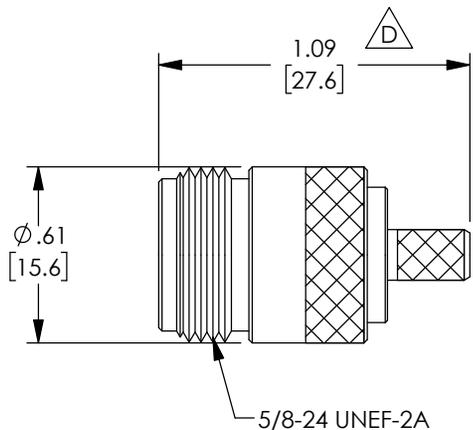

RECOMMENDED  
FERRULE  
CRIMP SIZE



RECOMMENDED  
PIN  
CRIMP SIZE

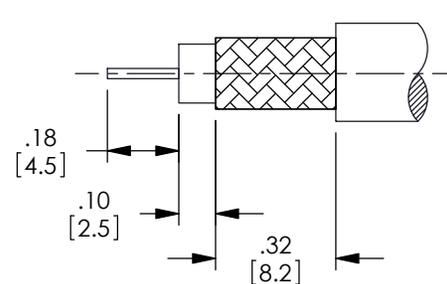

RECOMMENDED  
CABLE STRIPPING

**NOTES:**

**ELECTRICAL:**

IMPEDENCE: 50 OHMS  
WITHSTAND VOLTAGE: 2500V  
FREQUENCY RANGE: 0~6 GHz  
VSWR: <1.50 @ 0~6 GHz  
DURABILITY: ≥ 500 CYCLE  
CABLE RETENTION: > 40 POUNDS

**MISCELLANEOUS:**

COMPONENTS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATIONS PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE			50 HIGH STREET NORTH ANDOVER, MA 01845
	DRAWN BY DFRISIELLO	08/09/2010			CATEGORY
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [51] .XXX = ±.005 [1.27]	CHECKED BY K.BURGNER	08/09/2010	PRODUCT DESCRIPTION TYPE N STR CRIMP JACK LMR200		
	APPROVED BY K.BURGNER	08/09/2010			
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		A	43321	ANF-1202
COLOR VARIATIONS MAY OCCUR		SCALE: NONE	CAD FILE: ANF-1202.SLDDRW	SHEET 1 OF 1	