




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
G	ECN 7359: CHANGE STRIPPING DIMENSIONS	3/28/14	D.FRISIELLO


DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL
CENTER CONTACT	PHOSPHOR BRONZE	GOLD
OUTER CONTACT	BRASS	NICKEL
FERRULE	BRASS	NICKEL
GASKET	RUBBER	---
INSULATOR	TEFLON	---

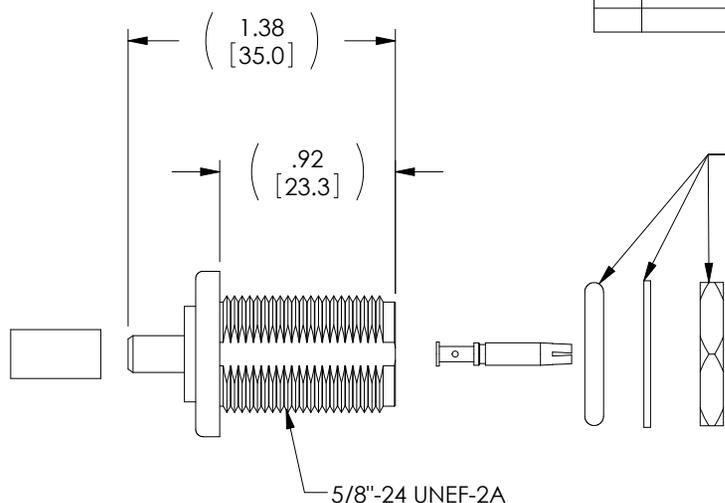


RECOMMENDED PIN CRIMP



RECOMMENDED FERRULE CRIMP

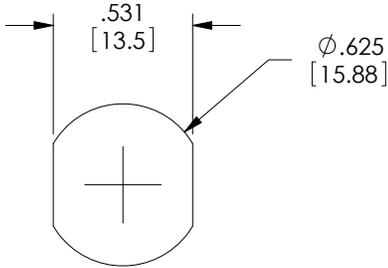

RECOMMENDED PANEL CUTOUT

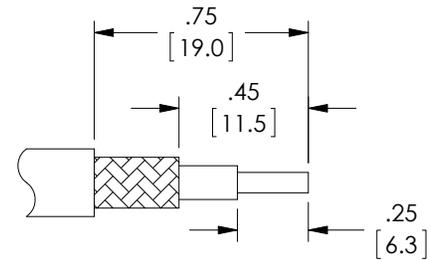

RECOMMENDED CABLE STRIPPING

NOTES:

ELECTRICAL:
 IMPEDANCE: 50 OHMS
 VOLTAGE RATING: 1500 VOLTS PEAK
 FREQUENCY RANGE: DC ~ 3 GHz
 DIELECTRIC WITHSTANDING VOLTAGE: 2500 VOLTS RMS
 DURABILITY: > 500 CYCLE
 CABLE RETENTION: > 40 POUNDS PULL

MISCELLANEOUS:
 APPLICATION: LMR195, RG58 CABLE.
 COMPONENTS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

REGULATORY COMPLIANCE:
 CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY B. PUCHASKI CHECKED BY B. PUCHASKI APPROVED BY M. AUDAS	3/16/09 3/16/09 3/16/09	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [51] .XXX = ± .005 [1.27]	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	PRODUCT DESCRIPTION TYPE N BULKHEAD JACK, REAR MOUNT	SIZE A
PROJECTION 	COLOR VARIATIONS MAY OCCUR	FSCM NO. 43321	DWG. NO. ANF-3700
1AB04-025	SCALE: NONE	CAD FILE: ANF-3700.SLDDRW	REV. G