
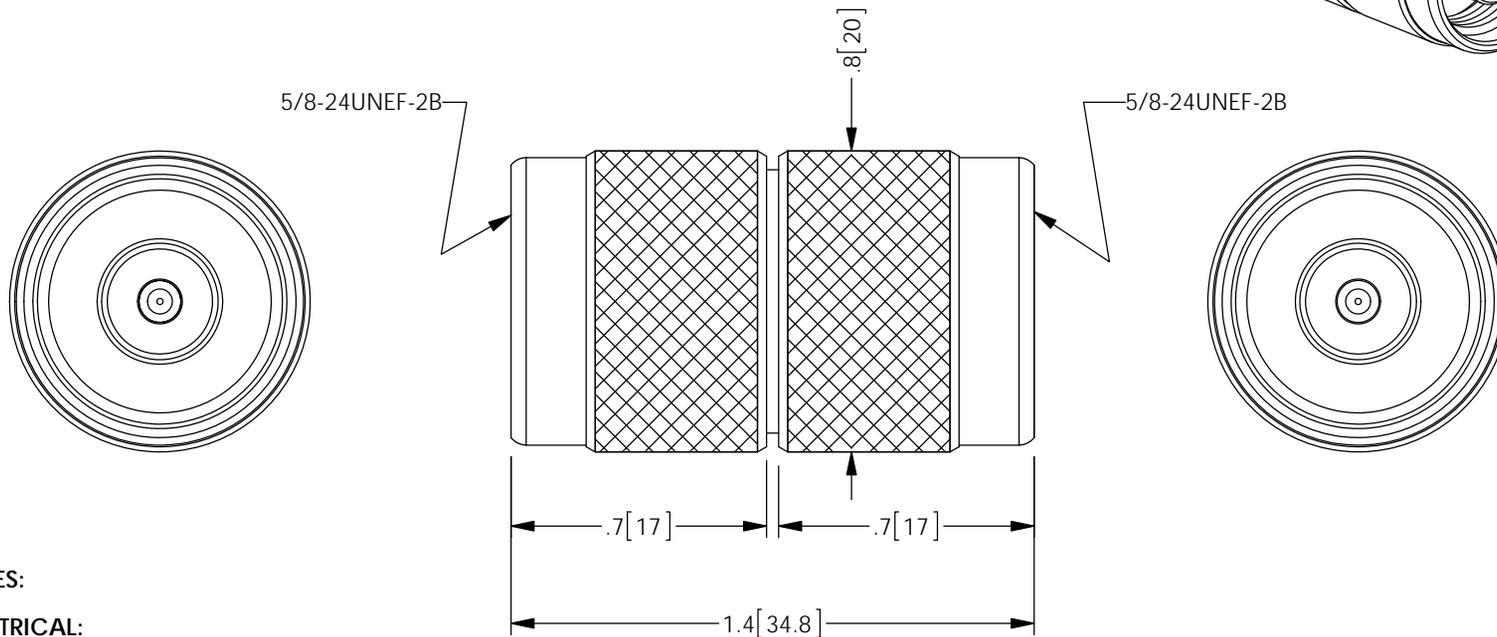


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	--	--
B	ECN8305 UPDATE SPECS	04/01/16	B.PUCHASKI

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL
SHELL(2)	BRASS	NICKEL
DIELECTRIC(2)	PTFE	--
CENTER PIN	BRASS	GOLD
GASKET(2)	RUBBER	--

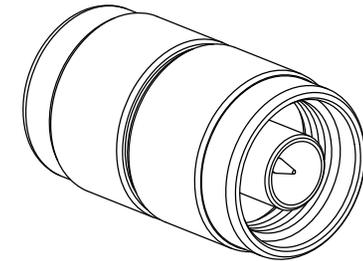

**NOTES:**

**ELECTRICAL:**

IMPEDENCE: 50 OHMS  
 FREQUENCY RANGE: DC-6 GHz  
 INSERTION LOSS: .2 dB MAX

**MISCELLANEOUS:**

COMPONENTS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATIONS PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

**REGULATORY COMPLIANCE:**

CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY B.PUCHASKI	04/01/16		
DIMENSIONAL TOLERANCES: .X = ±.1 [2.54] .XX = ±.01 [.25] .XXX = ±.005 [.13]	CHECKED BY K.BURGNER	04/01/16	CATEGORY COAXIAL	
	APPROVED BY P.PESA	04/01/16	PRODUCT DESCRIPTION N-MALE TO N-MALE "BARREL" ADAPTOR	
ANGULAR TOLERANCES: ALL = ± 1°	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE <b>A</b>	FSCM NO. <b>43321</b>
PROJECTION 	COLOR VARIATIONS MAY OCCUR	DWG. NO. AXA-NMNM	REV. <b>B</b>	SCALE: NONE
			CAD FILE: AXA-NMNM.SLDDRW	SHEET 1 OF 1