


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	E	UPDATED AS PER ECO-12577	09/14/2023	PSRINIVAS	DGUST

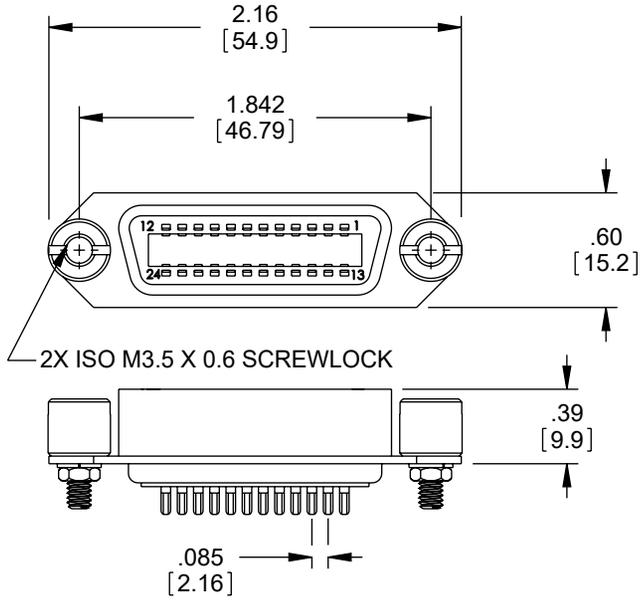


24-CONTACT FEMALE MINIATURE RIBBON CONNECTOR

NOTES:-


- MATERIALS:**
 CONTACTS : COPPER ALLOY
 INSULATOR : BLUE POLYBUTYLENE TEREPHTHALATE (PBT)
 U.L. 94V-0 RATED
 SHELL : STEEL
 SCREW LOCK/HEX NUT/LOCK WASHER : STEEL
- FINISHES:**
 CONTACTS : GOLD FLASH
 TERMINALS : TINNED
 SHELL : NICKEL PLATED
 SCREW LOCKS : BLACK OXIDE
 HEX NUT/LOCK WASHER : NICKEL PLATED
- SUPPLIED WITH HARDWARE ASSEMBLED.
- ALL DIMENSION ARE FOR REFERENCE ONLY.
- COMPONENT ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
 EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

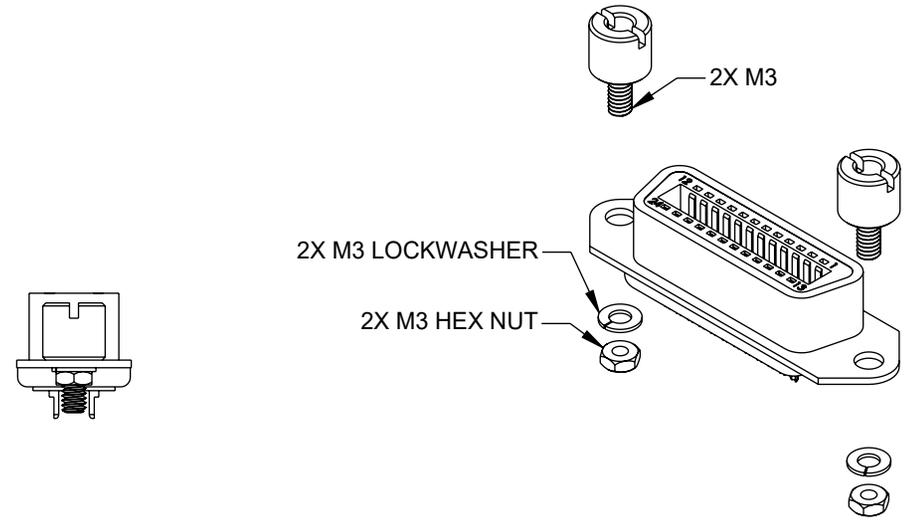

2X M3 LOCKWASHER
 2X M3 HEX NUT

RECOMMENDED
 PANEL CUTOUT

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [5] ANGLES ± 1° .XXX = ± .005 [13]	APPROVALS	DATE	 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936	
	DRAWN BY	10/24/2001		CATEGORY IEEE-488 CONNECTOR
	CHECKED BY	10/25/2001		
	APPROVED BY	10/26/2001		
THIRD-ANGLE PROJECTION	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	PRODUCT DESCRIPTION	CONNECTOR, GPIB SLDR, FEMALE	
	COLOR VARIATIONS MAY OCCUR	SIZE A CAGE CODE 43321 ITEM NO. CIB24S	REV. E	
		SCALE: NONE CAD FILE: CIB24S.SLDDRW	SHEET 1 OF 1	