


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant ✓

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
J	ECN 99999: ADDED VIEWS SHOWING L-COM LOGO	4/28/09	D. CASTRO
K	ECN6237: ADDED CONTACT PLATING NOTE. UPDATED FORMAT.	09/14/12	DFP
L	ECN 6763: CHANGED EXPANDED LENGTH FROM 16 TO 12.5 FEET, SR TO PVC.	3/29/13	D. DESJARDIN

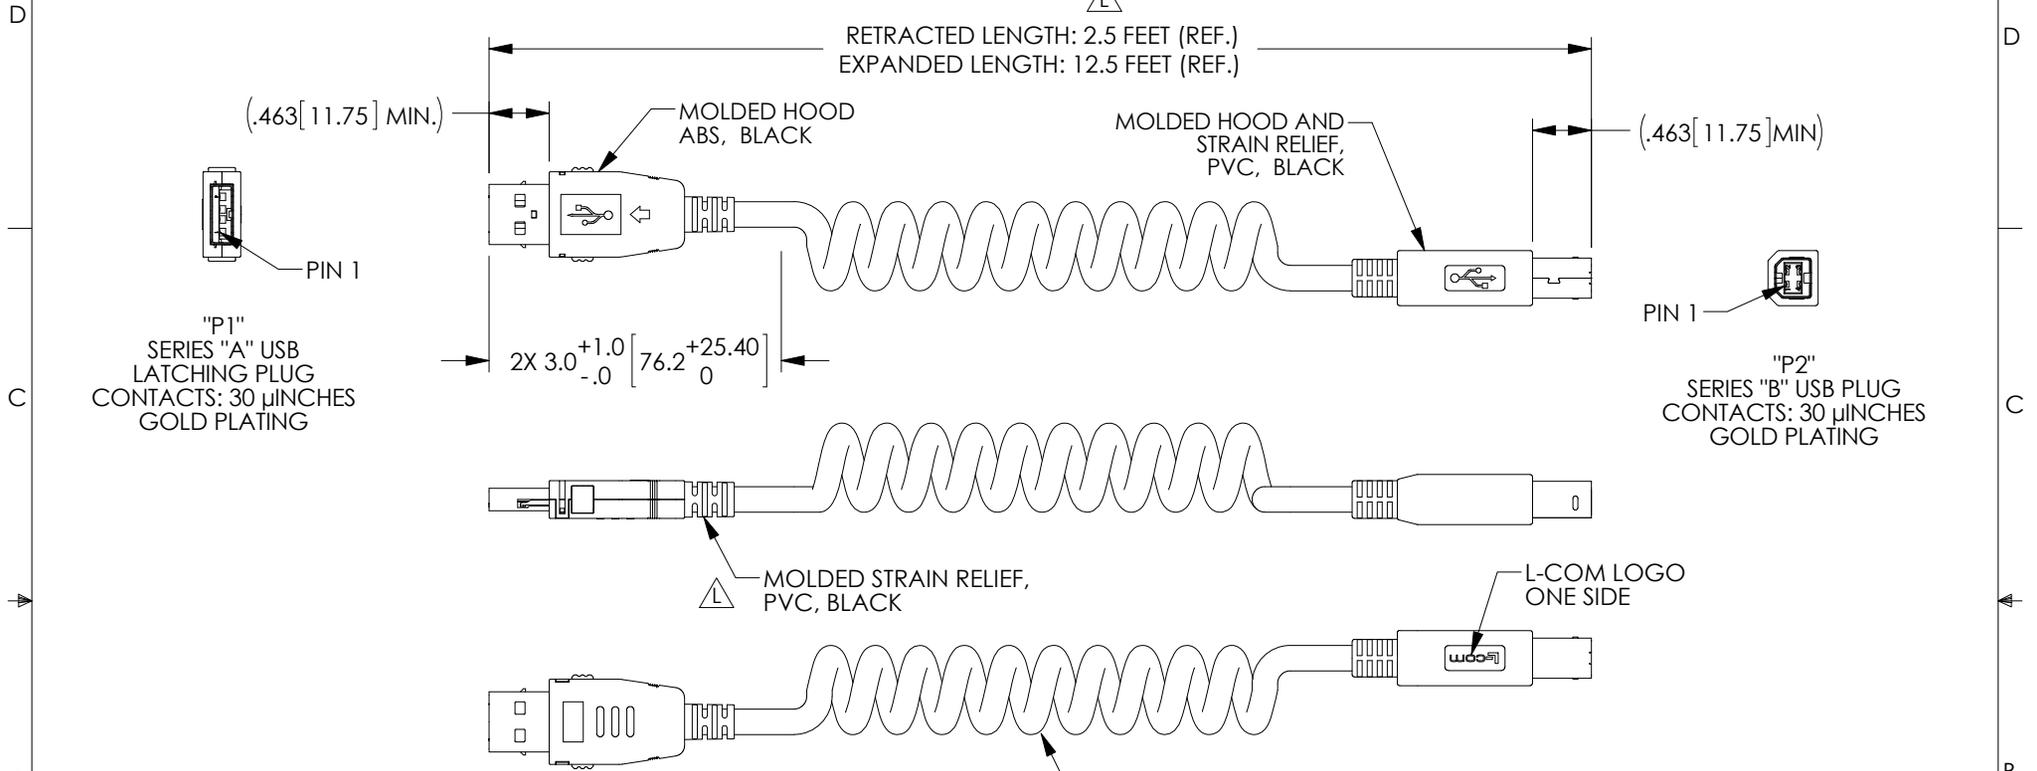


"P1" SERIES "A" USB LATCHING PLUG CONTACTS: 30 μINCHES GOLD PLATING

"P2" SERIES "B" USB PLUG CONTACTS: 30 μINCHES GOLD PLATING

ONE 28AWG STRANDED TINNED COPPER TWISTED PAIR
TWO 28AWG STRANDED TINNED COPPER CONDUCTORS
OVERALL ALUMINIZED POLYESTER SHIELD WITH DRAIN WIRE PLUS TINNED COPPER SPIRAL BRAID SHIELD.
POLYURETHANE BLACK OUTER JACKET.

"P1" WIRING DIAGRAM "P2"

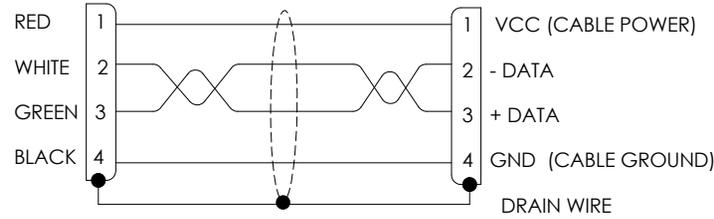

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY C.MCCORMICK	10/01/2004		CATEGORY
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ±.005	CHECKED BY D.PARHAM	10/01/2004	PRODUCT DESCRIPTION	CBL,USB A/B COIL
PROJECTION 	APPROVED BY R.CARRICK	10/01/2004		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY
	COLOR VARIATIONS MAY OCCUR		SCALE: NONE	CAD FILE: COILUAB.SLDDRW SHEET 1 OF 1