


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	DRAWING REPLACES CTC-1-OD1	6/27/14	D.FRISIELLO

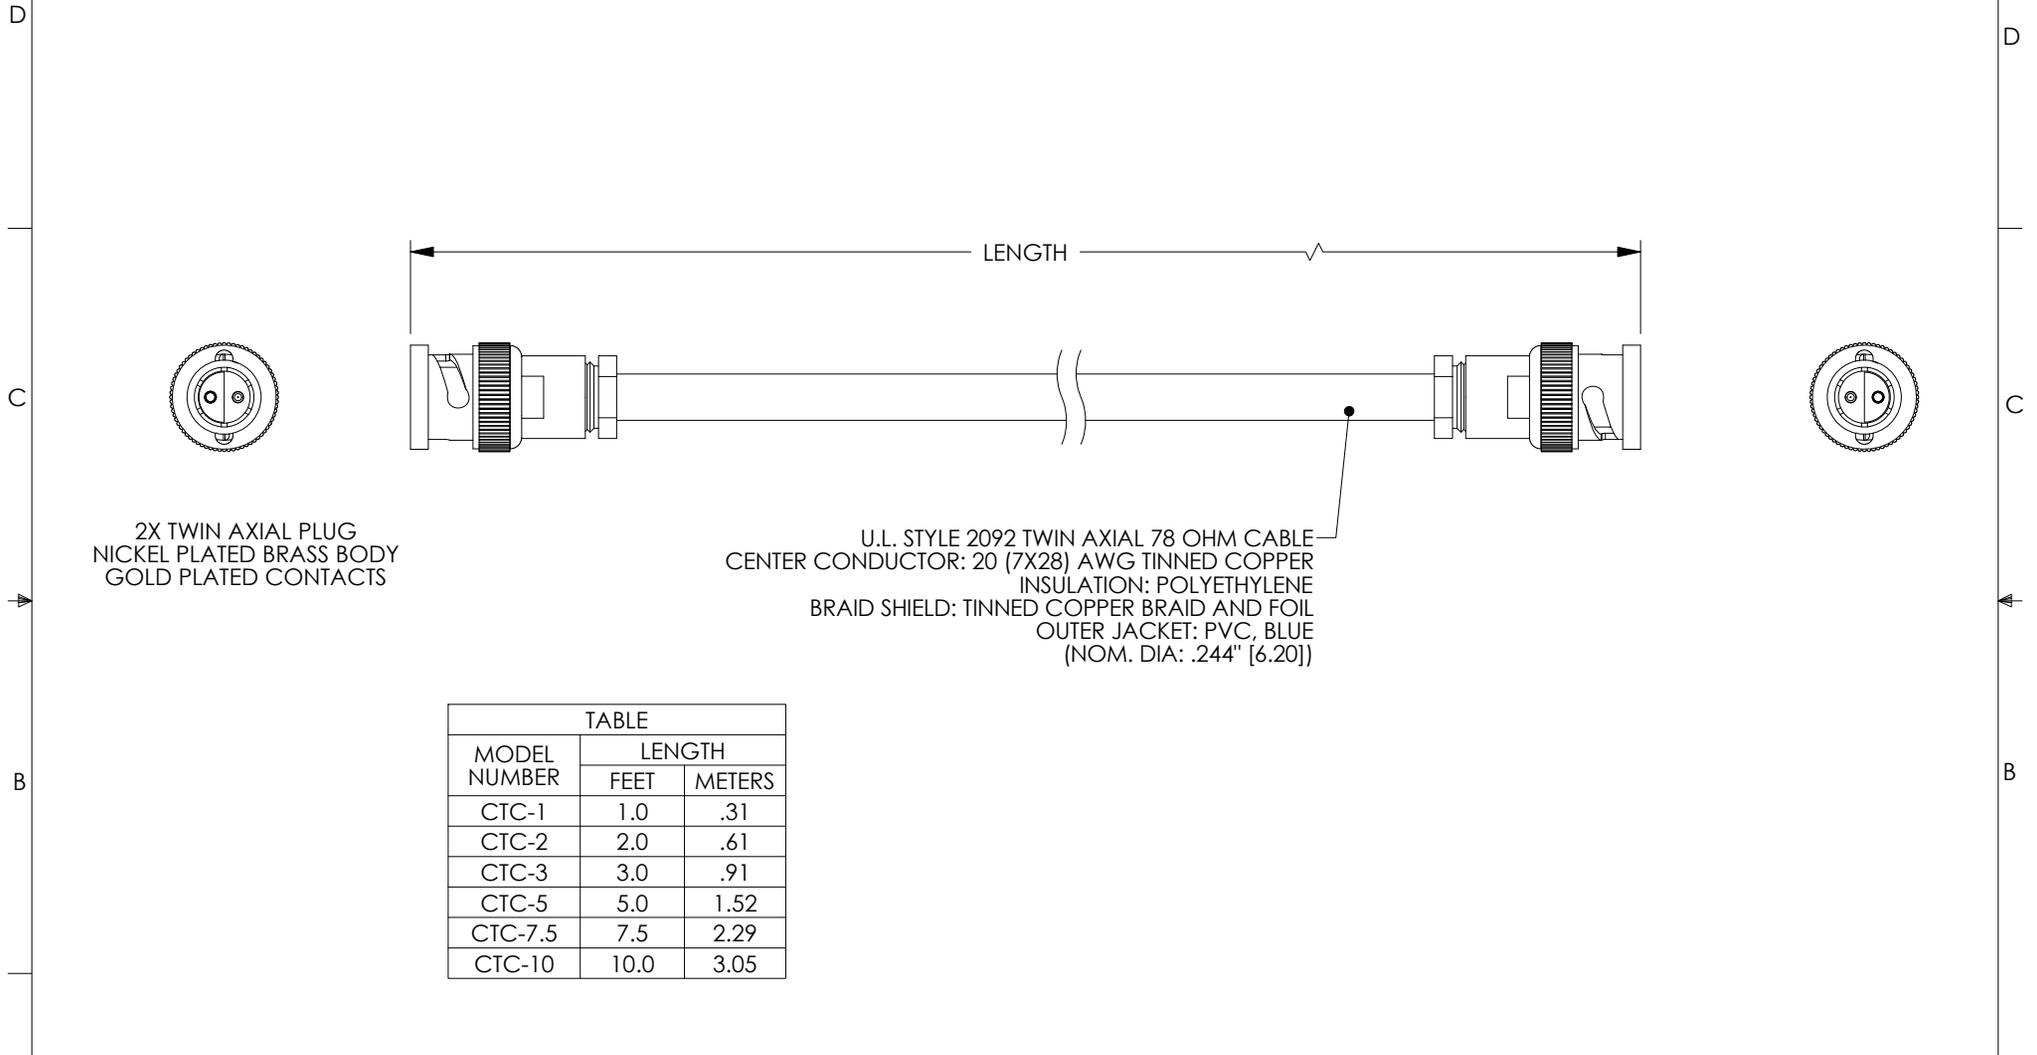

2X TWIN AXIAL PLUG
NICKEL PLATED BRASS BODY
GOLD PLATED CONTACTS

U.L. STYLE 2092 TWIN AXIAL 78 OHM CABLE
CENTER CONDUCTOR: 20 (7X28) AWG TINNED COPPER
INSULATION: POLYETHYLENE
BRAID SHIELD: TINNED COPPER BRAID AND FOIL
OUTER JACKET: PVC, BLUE
(NOM. DIA: .244" [6.20])

MODEL NUMBER	LENGTH	
	FEET	METERS
CTC-1	1.0	.31
CTC-2	2.0	.61
CTC-3	3.0	.91
CTC-5	5.0	1.52
CTC-7.5	7.5	2.29
CTC-10	10.0	3.05

NOTES:

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845		
	DRAWN BY MCCORMICK	09/24/01		CATEGORY COAXIAL		
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ± .005 [1.13]	CHECKED BY ENG	09/24/01	PRODUCT DESCRIPTION CA TWIN BNC M/M 78 OHM			
	APPROVED BY R.CARRICK	09/24/01				
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. CTC-1	REV. A
SCALE: NONE			CAD FILE: CTC-1.SLDDRW		SHEET 1 OF 1	