


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/25/06	MCCORMICK
A	ECN99999: ADDED END VIEWS AND NOTE 3. UPDATED FORMAT.	02/09/10	DFP

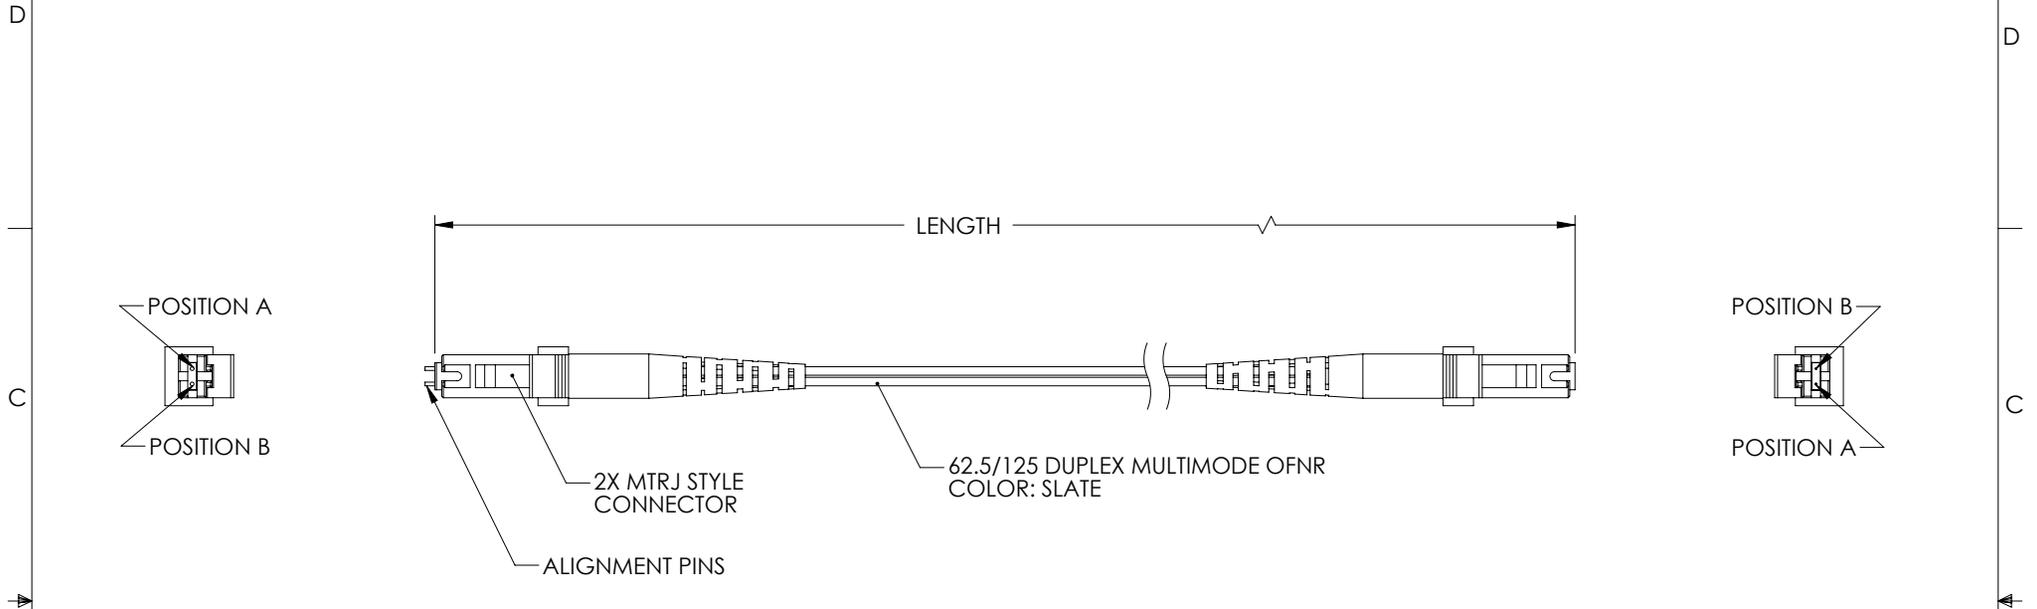

PART #	LENGTH FEET [METERS]
FODMTRJP-01	3.28 [1.0]
FODMTRJP-02	6.56 [2.0]
FODMTRJP-03	9.84 [3.0]
FODMTRJP-04	13.12 [4.0]
FODMTRJP-05	16.40 [5.0]

**NOTES:**

1. INSERTION LOSS TESTED AT 1300nm WITH A <-1.0 dB RESULT.
2. ALL CONNECTORS ACCOMPANIED WITH A DUST CAP (NOT SHOWN).
3. CABLE ASSEMBLY SHALL BE PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY C.MCCORMICK	10/25/2006	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	CHECKED BY R.EVANS	10/25/2006	PRODUCT DESCRIPTION 62.5/125 DUPLEX MTRJ CABLE ASSY
	APPROVED BY J.ROBERTS	10/25/2006	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SCALE: NONE    CAD FILE: FODMTRJP.SLDDRW    SHEET 1 OF 1