


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE
PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE
WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.




REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/13/16	D.FRISIELLO

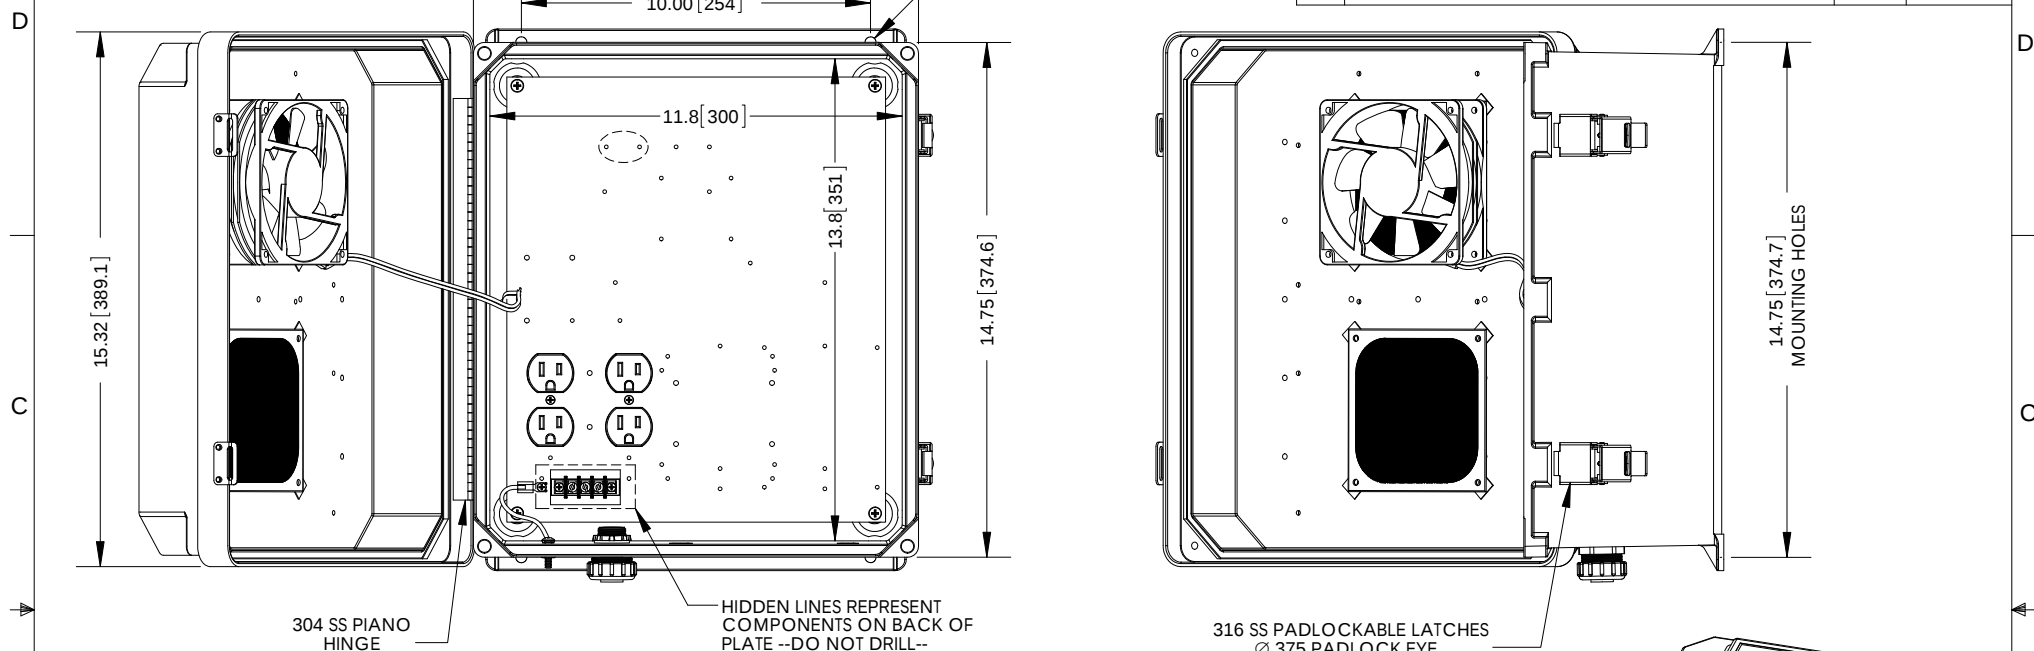

NOTE:

- 1- ENCLOSURE MATERIAL-GRAY (RAL7035)
HOT MOLDED FIBERGLASS REINFORCED POLYESTER
- 2- NEMA RATED TYPE 3, 3R, 3S, 4, 4X, 12 AND 13 PRIOR TO MODIFICATIONS.
- 3- IEC 529 RATED IP 66 PRIOR TO MODIFICATION.
- 4- TEMPERATURE RANGE FROM -50 DEG C TO 150 DEG C.
- 5- SELF EXTINGUISHING AND HALOGEN FREE.
- 6- CABINETS ARE MAINTENANCE FREE AND CORROSION RESISTANT.
- 7- SHALL BE PACKAGED AS PER L-COM SPEC PKG-00070

REGULATORY COMPLIANCE:
CE2011/65/EU(ROHS DIRECTIVE)

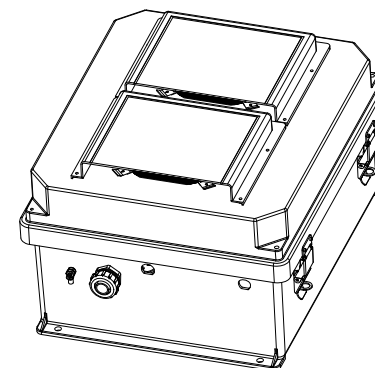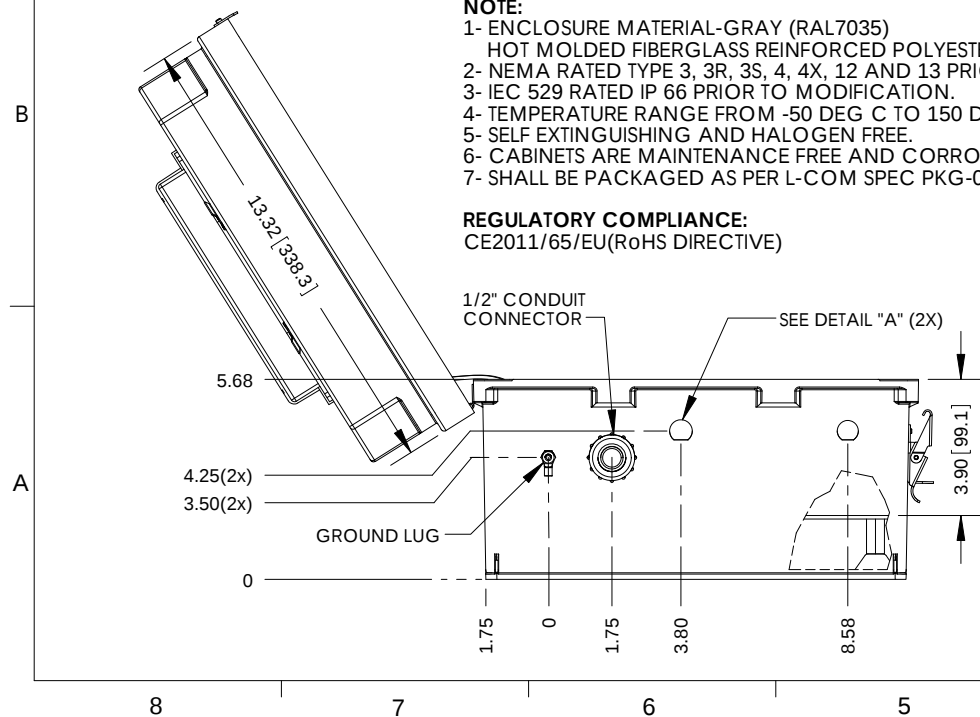

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] DIMENSIONAL TOLERANCES: X = ± 1 [2.54] .XX = ± .01 [.25] .XXX = ± .005 [.13] ANGULAR TOLERANCES: ALL = ± 1°	APPROVALS	DATE	L-com® Global Connectivity 50 HIGH STREET NORTH ANDOVER, MA 01845			
	DRAWN BY B.PUCHASKI	07/13/16				
	CHECKED BY K.BURGNER	07/13/16	CATEGORY	ENCLOSURE		
APPROVED BY P.PESA	07/13/16					
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		PRODUCT DESCRIPTION NEMA ENCLOSURE 14 X 12 X 7 WEATHERPROOF 120VAC W/ 85° FAN			
PROJECTION 	COLOR VARIATIONS MAY OCCUR		SIZE	FSCM NO.	DWG. NO.	REV
			A	43321	NB141207-10F-1	A
			SCALE: NONE	CAD FILE: NB141207-10F-1.SLDDRW		SHEET 1 OF 1